


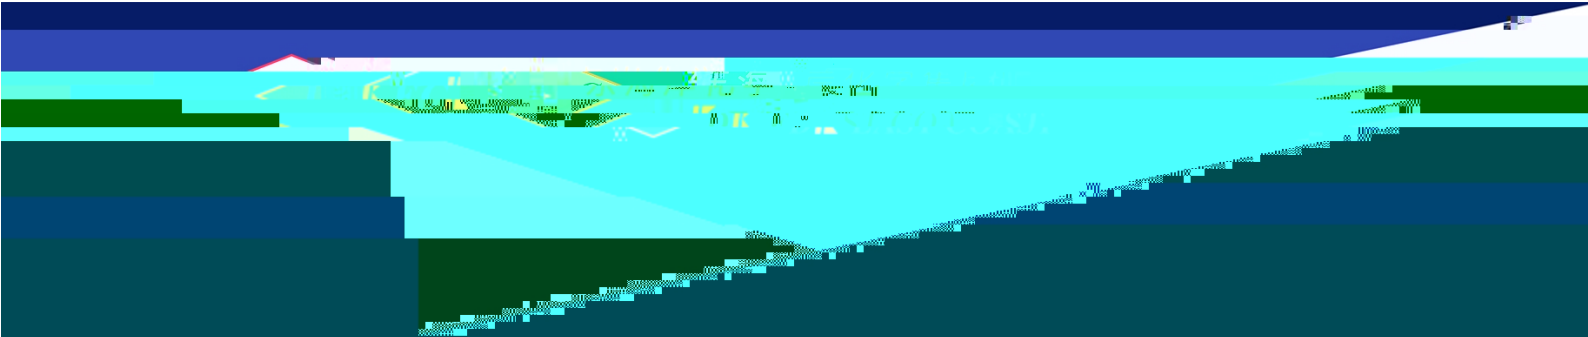

Solid Epoxy Resin E-20

1. Description

Solid Epoxy Resin E-20 is a high performance, two-part epoxy resin system. It is designed for use in a wide range of applications, including:

Relative Density	ASTM D 1298	1.16-1.18g/cc
Bulk density	ASTMD 1895	0.50-0.62MT/m ³
Water content	ASTM E 203-01	0.5 max
Insoluble	Tec-p -050	30ppm max

Product packaging

This product is packed and transported in 25 kg net per bag

Other packaging can be provided on request.

5. Storage and precautions

- 1). Epoxy resin should be stored in a cool and dry place.
- 2). When deploying epoxy resin, it is necessary to use it now and mix the curing agent in proper proportion to avoid waste.
- 3). Epoxy resin storage life is generally 1 year, beyond the time limit should be tested, meet the index can still be used.

Disclaimer